RADIO FREQUENCY COAXIAL CABLE

高週波同軸電纜

TUNG-YANG

Product Description:

- Copper or copper coated steel conductor.
- Transparent PE indulation.
- Bare copper braid shield, 95% coverage.
- Color-coded PVC jacket.
- Low losses and low propagation delays. Crosstalk kept to minimum.
- Refers to JIS C 3501.

◆說明：

- 導體使用單條或多條，裸銅或銅包鋼
- 透明PE絕緣
- 裸軟銅編織隔離，遮蔽率95%
- PVC披覆
- 低損失，傳遞效果高，干擾可減至最小
- 符合JIS 3501

Applications:

- For internal wiring of TV, radio, receivers, VTR, tape recorders, and other electronic equipment.

◆應用：

電視機、收音機、接收機、錄放影機及一般電子設備。

Construction:

◆構造：



Type Designation: 3 C - 2 VCS

品名記號：

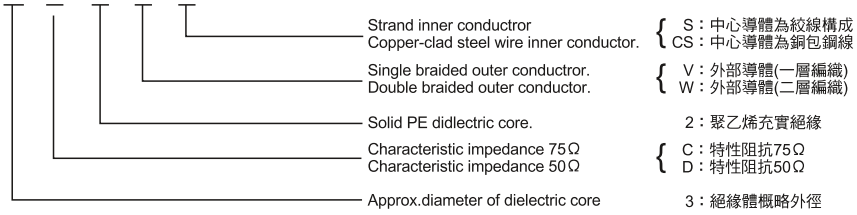

Cable Type No.	UL Style	Inner Conductor 中心導體		Insulation 絕緣		Braid 編織		Jacket Thickness 被覆厚度	Overall Diameter 完成外徑	Nominal Capa 靜電容量	Nominal Attenuation 10MHz 衰減量	Characterisa Impedance (10MHz) 特性阻抗	Item Number 產品編號
		Material 材質	No./mm 線數/線徑	Material 材質	mm 厚度	Material 材質	C/N/mm 線數/線徑	mm	mm	PF/m	dB/km	Ω	
1.5C-2V	1365	CCS	1/0.26	LD-PE	0.67	BC	16/5/0.10	0.4	2.9±0.10	69±4	96	75±3	BA1.5C2V
2.5C-2V	1150	BC	1/0.4	LD-PE	1.00	BC	16/6/0.127	0.5	3.9±0.10	69±4	52	75±3	BA2.5C2V
3C-2V	1071	BC	1/0.5	LD-PE	1.30	BC	16/7/0.127	0.8	5.4±0.15	67±3	42	75±3	BA3C2V
5C-2V	1071	BC	1/0.8	LD-PE	2.05	BC	16/10/0.12	0.9	7.4±0.15	67±3	27	75±3	BA5C2V
7C-2V	1354	BC	7/0.405	LD-PE	3.05	BC	24/7/0.18	1.0	10.3±0.20	67±3	22	75±3	BA7C2V
10C-2V	-	BC	7/0.50	LD-PE	3.95	BC	24/9/0.16	1.5	13.0±0.20	67±3	18	75±3	BA10C2V
1.5D-2V	1107	BC	7/0.18	LD-PE	0.53	BC	16/5/0.10	0.4	2.9±0.10	104±5	85	50±3	BA1.5D2V
2.5D-2V	1150	BC	1/0.80	LD-PE	0.95	BC	16/7/0.12	0.5	4.3±0.10	100±4	45	50±3	BA2.5D2V
3D-2V	1150	BC	7/0.32	LD-PE	1.00	BC	16/6/0.12	0.8	5.3±0.15	100±4	46	50±3	BA3D2V
5D-2V	1150	BC	1/1.40	LD-PE	1.70	BC	24/7/0.12	0.9	7.3±0.15	100±4	27	50±3	BA5D2V
8D-2V	1354	BC	7/0.80	LD-PE	2.70	BC	24/8/0.16	1.2	11.1±0.20	100±4	20	50±3	BA8D2V
5CFB	-	TC	1/1.02	PEf	1.8	FOiL	16/10/0.12	1.0	7.2±0.15	55±4	25	75±3	BA5CFB
7CFB	-	BC	1/1.6	PEf	2.8	FOiL	24/8/0.12	1.3	10.5±0.15	55±4	22	75±3	BA7CFB
8DFB	-	BC	1/2.6	PEf	2.45	FOiL	24/10/0.12	1.5	11.1±0.2	83±4	26	50±3	BA8DFB
5CFB+Y(1.2)		TC	1/1.02	PEf	1.8	TC	FOiL 24/7/0.12	1.0	7.2X3.0	55±4	25	75±3	SA5CFB
5CFB+Y(49/0.2)		TC	1/1.02	PEf	1.8	TC	FOiL 24/7/0.12	1.0	7.2X3.0	55±4	25	75±3	SA5CFBA
7CFB+Y(2.0)		BC	1/1.6	PEf	2.8	TC	FOiL 24/8/0.12	1.3	11X4.0	55±4	22	75±3	SA7CFB
電梯用同軸線		BC	50/0.12	PEf	1.8	BC	16/8/0.12	1.0	7.1±0.1	55±4	65	75±3	BA5CFV