

PE/PVC Telephone Cables

PE/PVC電話電纜



Product Description:

- Bare or tinned copper conductor.
- Two or more twisted singles or groups of twisted singles twisted together.
- Shield and covering optional.
- PE insuiation.
- PVC jacket.

◆說明：

- 導體使用，裸軟銅線或鍍錫軟銅線。
- 兩蕊以上絞合或對型絞合。
- 可加隔離或內被。
- PE絕緣。
- PVC被覆。

Applications:

- Applicationed for subscriber indoor circuit

◆應用：


用戶屋內電話電纜

Construction:

◆構造：

被覆：聚氯乙稀

絕緣體：PE絕緣

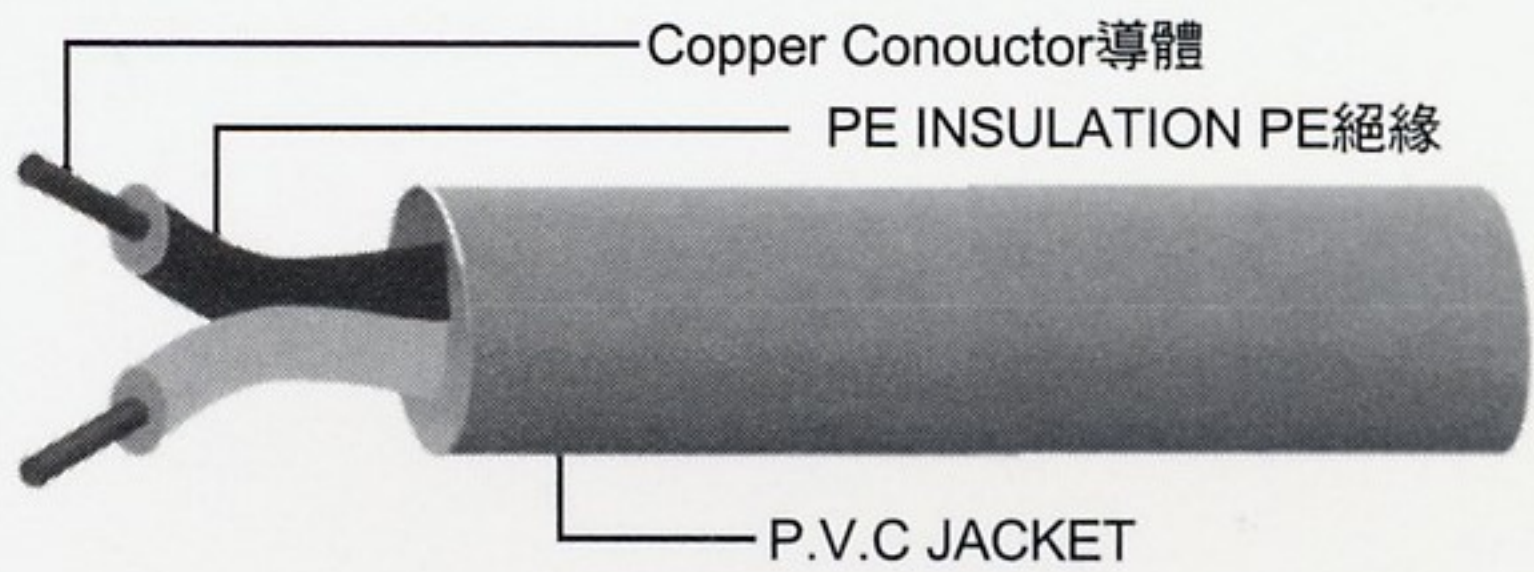

PE-PVC屋內電纜

導 體 線 徑 Diameter of Conductor mm	公 稱 對 數 Nominal pair Number P	絕 緣 外 徑 Diameter of Insulation mm	完 成 外 徑 Diameter of Sheath mm	產 品 編 號 Item Number	導 體 線 徑 Diameter of Conductor mm	公 稱 芯 數 Nominal of Number C	絕 緣 外 徑 Diameter of Insulation mm	完 成 外 徑 Diameter of Sheath mm	產 品 編 號 Item Number
0.5	2	0.9	4.5	GE0.5M02PA	0.5	2	0.9	3.0	GE0.5M02CA
	4	0.9	5.0	GE0.5M04PA		4	0.9	4.0	GE0.5M04CA
	5	0.9	5.5	GE0.5M05PA		7	0.9	4.5	GE0.5M07CA
	10	0.9	7.0	GE0.5M10PA		10	0.9	5.2	GE0.5M10CA
	15	0.9	9.0	GE0.5M15PA		14	0.9	6.0	GE0.5M14CA
	20	0.9	10.5	GE0.5M20PA	0.65	2	1.2	3.2	GE0.65M02CT
	25	0.9	11.0	GE0.5M25PA		4	1.2	4.5	GE0.65M04CT
	30	0.9	12.0	GE0.5M30PA		6	1.2	5.3	GE0.65M06CT
	40	0.9	13.0	GE0.5M40PA		8	1.2	5.6	GE0.65M08CT
	50	0.9	14.0	GE0.5M50PA		14	1.2	6.5	GE0.65M14CT