UL2464 COMPUTER CABLE

2464雙隔離電腦線

通陽 TUNG-YANG

Product Description:

- Tinned stranded, copper conductor.
- Color-coded semi-rigid PVC insulation or PVC insulation.
- Cores cabled under aluminum mylar shield.
- Tinned stranded copper drain wire.
- Tinned copper braid shield, 85% coverage.
- PVC jacketed computer and data transmissing cable.
- Rated temperature: 80℃. Rated voltage: 300 volts.
- Passes UL VW-1SC & CSA FT1 vertical flame test.

◆說明：

- 鍍錫銅絞線
- 半硬質PVC絕緣
- 芯線集合後鋁箔麥拉帶隔離
- 鍍錫軟銅地線
- 鍍錫銅線編織，遮蔽率85%
- 電腦資料傳輸電纜，PVC被覆
- 額定溫度：80℃
- 額定電壓：300Voits
- 可通過UL VW-1SC及CSA FT1 垂直型耐燃測試

Applications:

- Computer cables for EIA RS-232 and CAD/CAM applications.

◆應用：

國際電工法EIA RS232及CAD/CAM規定使用之電腦線

Construction:

◆構造：鋁箔＋銅網遮蔽

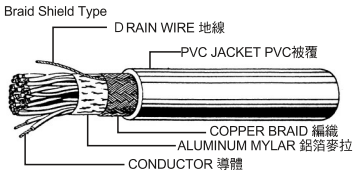

Conductor 導體		No. of	Insulation Thickness	Insulation Diameter	Overall Diameter	Nominal Capa 靜電容量		Item Number
線號	線 數/線 徑	Core	絕緣厚度	蕊線外徑	完成外徑	A	B	產品編號
AWG	No./ mm	芯線數	mm	mm	mm	pF/ft	pF/ft	TA-CORE系列
26	7/0.16TC	3	0.25	1.0	4.5	32	52	TA26G03CT
		4	0.25	1.0	4.8	32	52	TA26G04CT
		5	0.25	1.0	5.1	32	52	TA26G05CT
		6	0.25	1.0	5.4	28	51	TA26G06CT
		7	0.25	1.0	5.4	28	51	TA26G07CT
		9	0.25	1.0	6.0	28	51	TA26G09CT
		10	0.25	1.0	6.3	28	51	TA26G10CT
		12	0.25	1.0	6.6	28	51	TA26G12CT
		16	0.25	1.0	7.5	28	51	TA26G16CT
		25	0.25	1.0	8.6	28	51	TA26G25CT
		37	0.25	1.0	9.7	28	51	TA26G37CT
		50	0.25	1.0	11.0	28	51	TA26G50CT
24	7/0.203TC	3	0.25	1.1	4.8	35	65	TA24G03CT
		4	0.25	1.1	5.0	35	65	TA24G04CT
		5	0.25	1.1	5.5	35	65	TA24G05CT
		6	0.25	1.1	6.0	30	55	TA24G06CT
		7	0.25	1.1	6.0	30	55	TA24G07CT
		9	0.25	1.1	6.5	30	55	TA24G09CT
		10	0.25	1.1	6.5	30	55	TA24G10CT
		12	0.25	1.1	7.0	30	55	TA24G12CT
		16	0.25	1.1	8.0	30	55	TA24G16CT
		25	0.25	1.1	9.0	30	55	TA24G25CT
		37	0.25	1.1	10.5	30	55	TA24G37CT
		50	0.25	1.1	11.9	30	55	TA24G50CT
22	7/0.254TC or 17/0.16TC	3	0.25	1.3	5.2	37	67	TA22G03CT
		4	0.25	1.3	5.5	37	67	TA22G04CT
		5	0.25	1.3	6.0	35	63	TA22G05CT
		6	0.25	1.3	6.5	35	63	TA22G06CT
		7	0.25	1.3	6.5	35	63	TA22G07CT
		9	0.25	1.3	7.1	35	63	TA22G09CT
		10	0.25	1.3	7.5	35	63	TA22G10CT
		12	0.25	1.3	7.5	35	63	TA22G12CT
		16	0.25	1.3	8.5	35	63	TA22G16CT
		25	0.25	1.3	10.0	35	63	TA22G25CT
		37	0.25	1.3	11.9	35	63	TA22G37CT
		50	0.25	1.3	13.5	35	51	TA22G50CT

T.C:鍍錫銅線　　靜電容量 A: 導體對導體　　B: 導體對地線