PCV INSTRUMENT CABLE(Pair Type)

PVC各隔遮蔽電纜（鋁箔各隔＋地線＋銅網總隔）

TUNG-YANG

Product Description:

- Tinned stranded, copper conductor.
- Color-coded semi-rigid PVC insulation or PVC insulation.
- Paired cores cable each pair individually shielded with aluminum/mylar drain wire & overall tinned copper braid shielded.
- Rated temperature: 80℃. Rated voltage: 300 volts.
- Passes UL VW-1SC & CSA FT1 vertical flame test.

◆說明：

- 鍍錫銅絞線
- 半硬質PVC絕緣或PVC絕緣
- 遮蔽：對絞集合，每對鋁箔麥拉＋地線個別遮蔽後再鋁箔麥拉＋地線＋銅網編織
- 額定溫度：80℃
- 額定電壓：300Voits
- 可通過UL VW-1SC及CSA FT1垂直型耐燃測試

Applications:

- Sound broadcast, audio instrumentation and communication cables

◆應用：

廣播，視聽器具，儀器，電腦，通訊等

Construction:

◆構造：鋁箔個別遮蔽＋銅網整體隔離（對型）

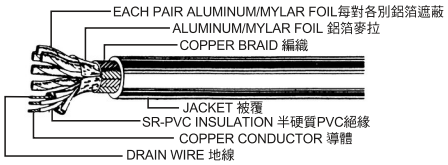

Conductor 導體		No. of	Insulation Thickness	Insulation Diameter	Overall Diameter	Nominal Capa 靜電容量		Item Number
線號	線 數/線 徑	Pair	絕緣厚度	蕊線外徑	完成外徑	A	B	產品編號
AWG	No./ mm	對數	mm	mm	mm	pF/ft	pF/ft	TS-PAIR系列
24	7/0.203TC	2	0.25	1.1	5.5	30	50	TS24G02PT
		3	0.25	1.1	6.0	30	50	TS24G03PT
		4	0.25	1.1	7.0	30	50	TS24G04PT
		5	0.25	1.1	7.5	30	50	TS24G05PT
		6	0.25	1.1	9.2	30	50	TS24G06PT
		7	0.25	1.1	9.6	30	50	TS24G07PT
		8	0.25	1.1	9.9	30	50	TS24G08PT
		9	0.25	1.1	10.4	30	50	TS24G09PT
		10	0.25	1.1	11.0	30	50	TS24G10PT
		12	0.25	1.1	12.1	30	50	TS24G12PT
		14	0.25	1.1	12.7	30	50	TS24G14PT
		16	0.25	1.1	13.4	30	50	TS24G16PT
		18	0.25	1.1	13.9	30	50	TS24G18PT
		20	0.25	1.1	14.5	30	50	TS24G20PT
		25	0.25	1.1	16.6	30	50	TS24G25PT
		30	0.25	1.1	17.5	30	50	TS24G30PT
		40	0.25	1.1	19.0	30	50	TS24G40PT
		50	0.25	1.1	20.8	30	50	TS24G50PT
22	7/0.254TC or 17/0.16TC	2	0.25	1.3	6.0	50	95	TS22G02PT
		3	0.25	1.3	7.0	50	95	TS22G03PT
		4	0.25	1.3	7.5	50	95	TS22G04PT
		5	0.25	1.3	8.5	50	95	TS22G05PT
		6	0.25	1.3	9.0	50	95	TS22G06PT
		7	0.25	1.3	10.7	50	95	TS22G07PT
		8	0.25	1.3	11.4	50	95	TS22G08PT
		9	0.25	1.3	11.9	50	95	TS22G09PT
		10	0.25	1.3	12.4	50	95	TS22G10PT
		12	0.25	1.3	13.2	50	95	TS22G12PT
		14	0.25	1.3	13.5	50	95	TS22G14PT
		16	0.25	1.3	13.8	50	95	TS22G16PT
		18	0.25	1.3	14.7	50	95	TS22G18PT
		20	0.25	1.3	15.6	50	95	TS22G20PT
		25	0.25	1.3	18.0	50	95	TS22G25PT
		30	0.25	1.3	18.5	50	95	TS22G30PT
		40	0.25	1.3	20.5	50	95	TS22G40PT
		50	0.25	1.3	22.9	50	95	TS22G50PT

T.C:鍍錫銅線　　靜電容量 A: 導體對導體　　B: 導體對地線